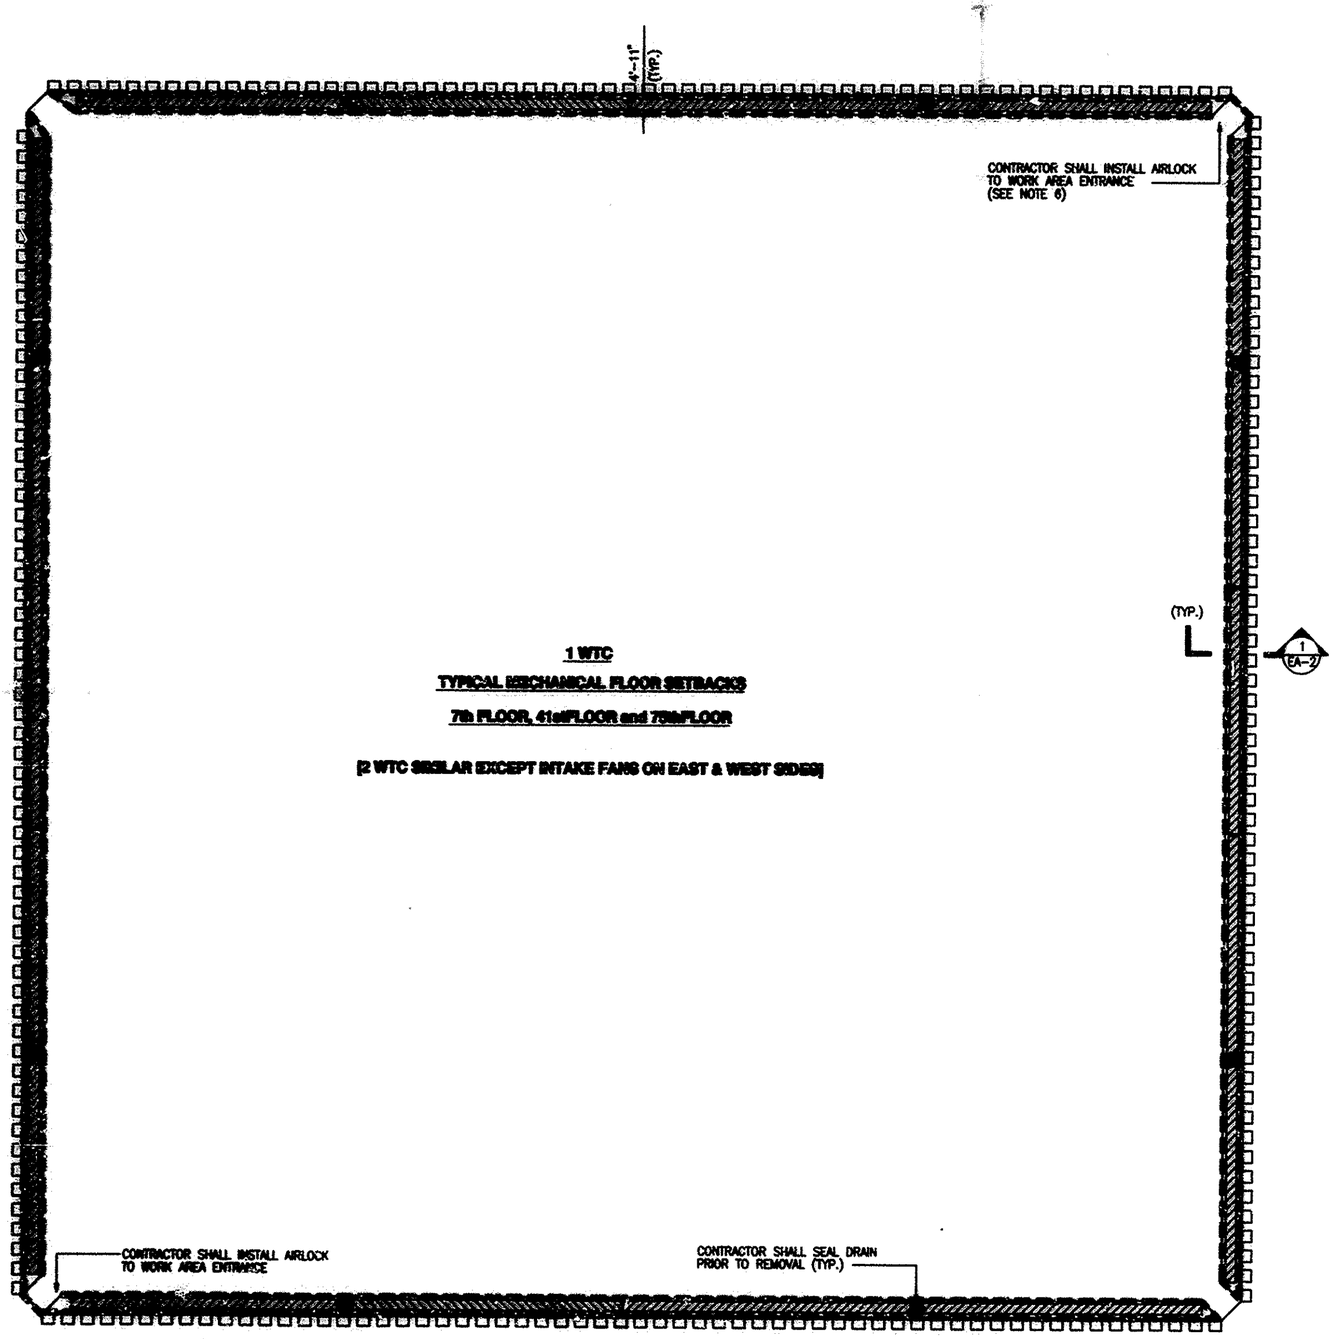

N

NOTES

1. A REMOTE DECONTAMINATION ENCLOSURE SHALL BE CONSTRUCTED IN EACH BUILDING AT A LOCATION APPROVED BY THE ENGINEER.
2. WATER, DRAIN AND ELECTRICAL FACILITIES SHALL BE DETERMINED ON SITE AND IS SUBJECT TO APPROVAL BY THE ENGINEER. THE CONTRACTOR IS RESPONSIBLE FOR TEMPORARY UTILITY HOOK-UPS.
3. REMOVE ALL BUILT-UP ROOFING MATERIAL INCLUDING FLASHING AND DISPOSE AS ASBESTOS WASTE.
4. AFTER EACH SEQUENCE OF ROOF IS ABATED, CONTRACTOR SHALL PROVIDE PROTECTION TO THE EXPOSED ROOF SLAB USING "VISQUINE" OR EQUIVALENT.
5. THE CONTRACTOR SHALL SEAL ALL OPENINGS, (GRILLES, DUCTS AND COMMUNICATING OPENINGS, ETC.) ONE STORY ABOVE AND ONE STORY BELOW ROOF LEVEL OF THE IMMEDIATE WORK AREA AND EXTENDING 25 FEET BEYOND.
6. ENTRANCE TO ROOF SETBACKS ARE LOCATED IN THE NORTHEAST AND SOUTHWEST CORNERS OF THE FLOOR IN ONE WORLD TRADE CENTER AND IN THE NORTHWEST AND SOUTHEAST CORNERS OF THE FLOOR IN TWO WORLD TRADE CENTER.

LEGEND

BOUNDARY OF WORK AREA

BUILT-UP ROOFING MATERIAL TO BE REMOVED

ROOF DRAIN

Sheet 6 of 8

[redacted]

Peter K. Sweeney
ENGINEERING PROGRAM MANAGER W.T.C.

Marvin Kirshner
CHIEF ENVIRONMENTAL ENGINEER

Engineering Program Manager

No.	Date	Revision	Approved
1	03/16/01	Drawing of Record	

Engineering Department
Design Division

The World Trade Center

Title

ONE & TWO WORLD TRADE CENTER
M.E.R. SETBACKS
FLOORS 7, 41 & 75

ASBESTOS ABATEMENT & REROOFING

ENVIRONMENTAL
TYPICAL FLOOR PLAN

This drawing subject to conditions in contract. All inventions, ideas, designs and methods herein are reserved to Port Authority and may not be used without its written consent.

E.K.	L.H.	T.M.
Designed by	Drawn by	Checked by

Date: 5-3-96 Scale: NO SCALE

Contract Number: WTC-115.286

Drawing Number: EA-1